



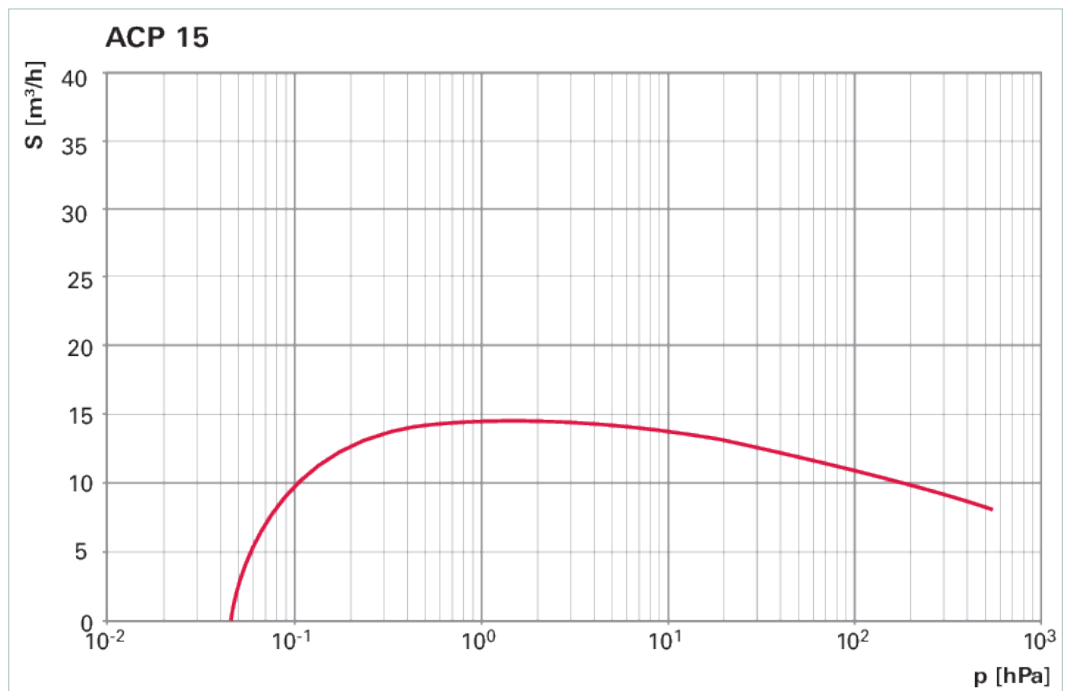


ACP 15 , 标准版本 , 单相 , 封闭气镇

ACP 15, 标准版本, 单相, 封闭气镇

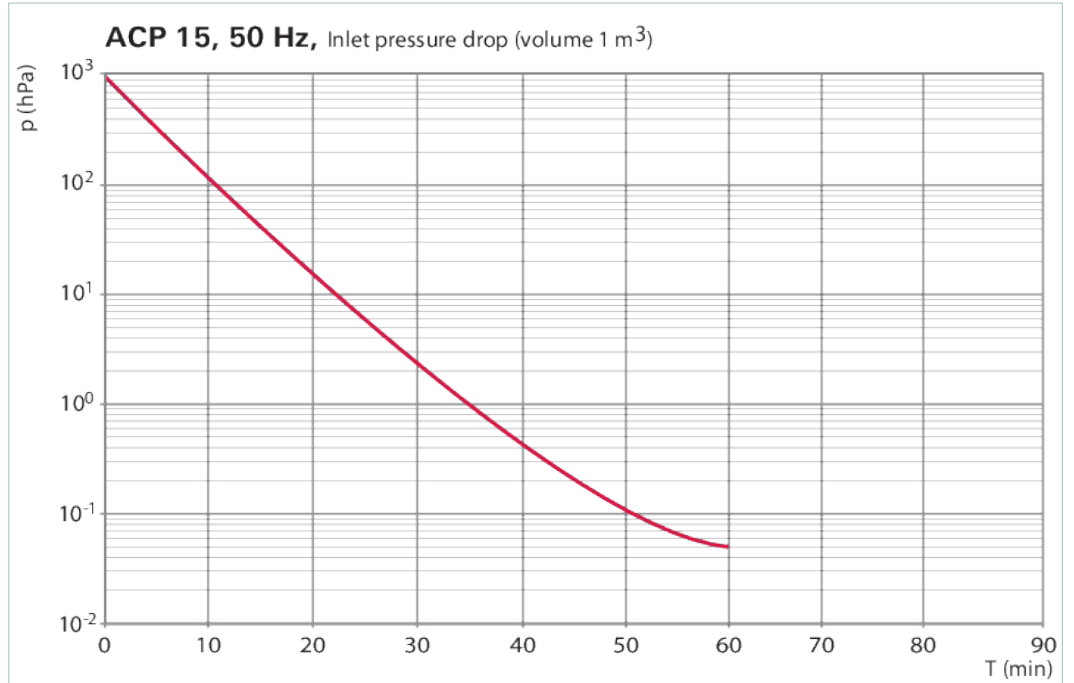

尺寸

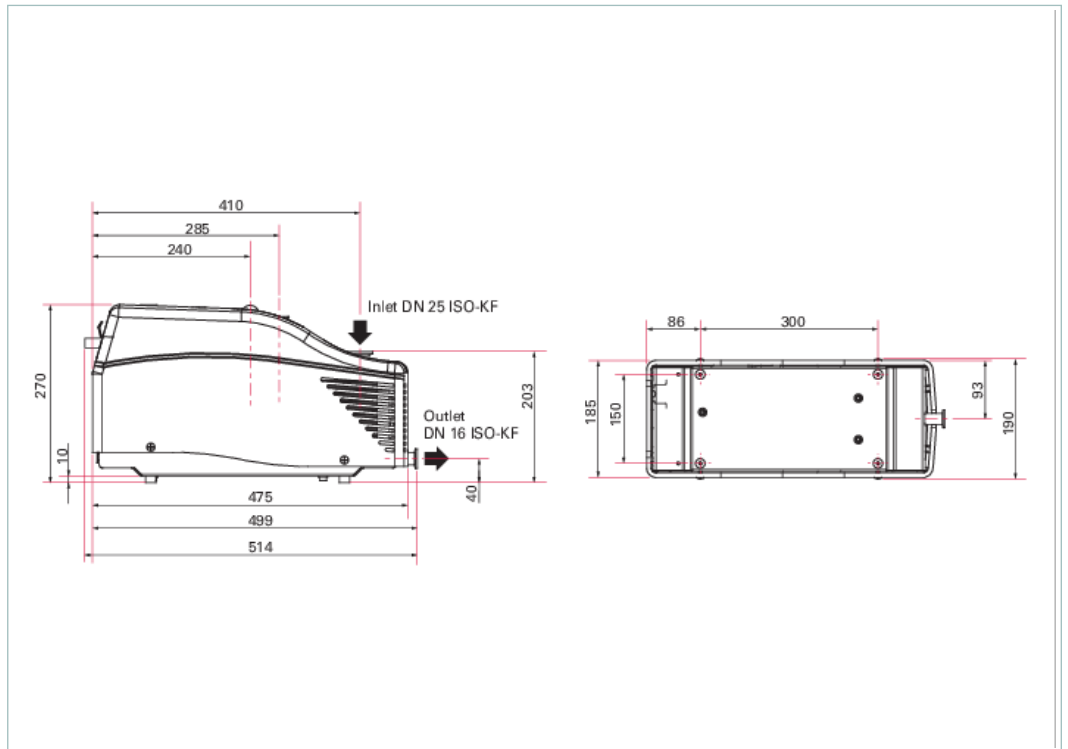

技术参数	ACP 15, 标准版本, 单相, 封闭气镇
不带气镇的最终压力	5 10^{-2}
冷却	空气
声压水平	63 分贝 (A)
尺寸 (长 x 宽 x 高)	514 x 190 x 270 毫米
抽速	14 m ³ /h 8.24 cfm 233.33 l/min
最大氦气泄漏率	5 10^{-8} hPa l/s 3.75 10^{-8} Torr l/s 5 10^{-8} mbar l/s
最大水蒸气容积	80 g/h
最大连续进气压力	1013 百帕
最终压力时的功率消耗	450 瓦
最高排气压力	1200 百帕
气镇	否
气镇流量	0.5 m ³ /h 0.29 cfm 8.33 l/min
版本	标准
环境温度	12 – 40 摄氏度
电源电缆	是, EU 电源线
电源连接:	110 – 230 V AC ($\pm 10\%$) 50/60 Hz
过程	清洁制成工艺
连接法兰 (入口)	DN 25 ISO-KF
连接法兰 (出口)	DN 16 ISO-KF
重量	23 千克

订单号	
ACP 15, 标准版本	V5SATSGBEF

配件	
保护 灰尘分离器/入口粒子过滤器	
入口粒子过滤器 IPF 25 (DN 25)	111649
降噪 降噪盖	
降噪盖 NRC 15, 用于 ACP 15 泵	111968
隔声室套件 SEK 15, 用于 ACP 15 泵	122480
降噪 排气消声器	
外部消声器 ES 25 S, DN 25	109873

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

PFEIFFER  **VACUUM**