



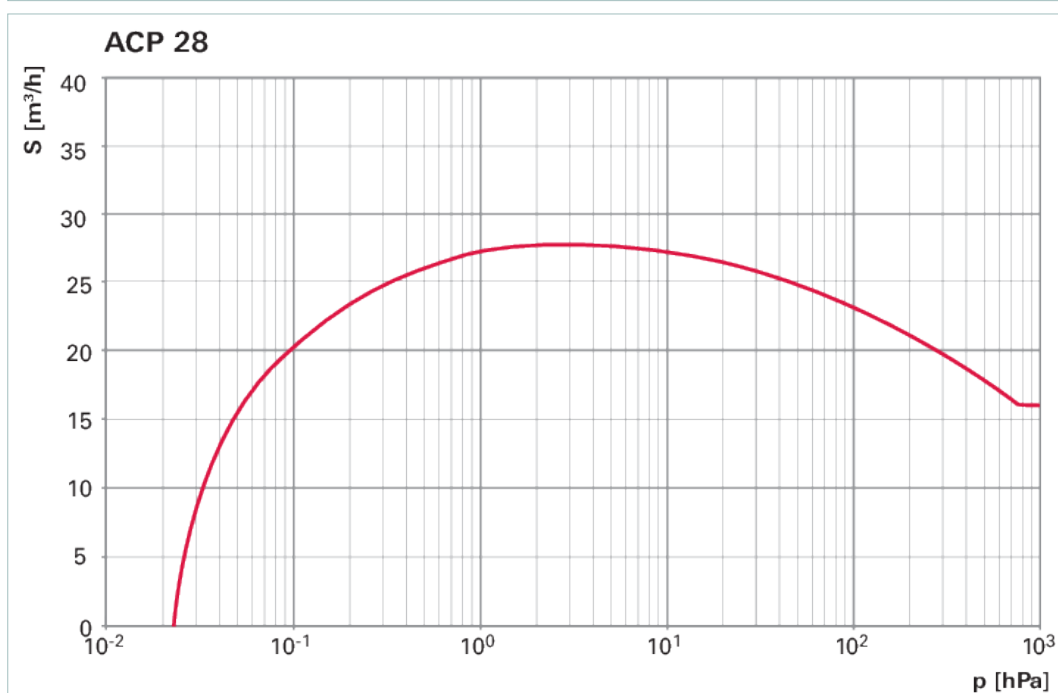


ACP 28 , 标准版本 , 单相 , 封闭气镇

ACP 28, 标准版本, 单相, 封闭气镇

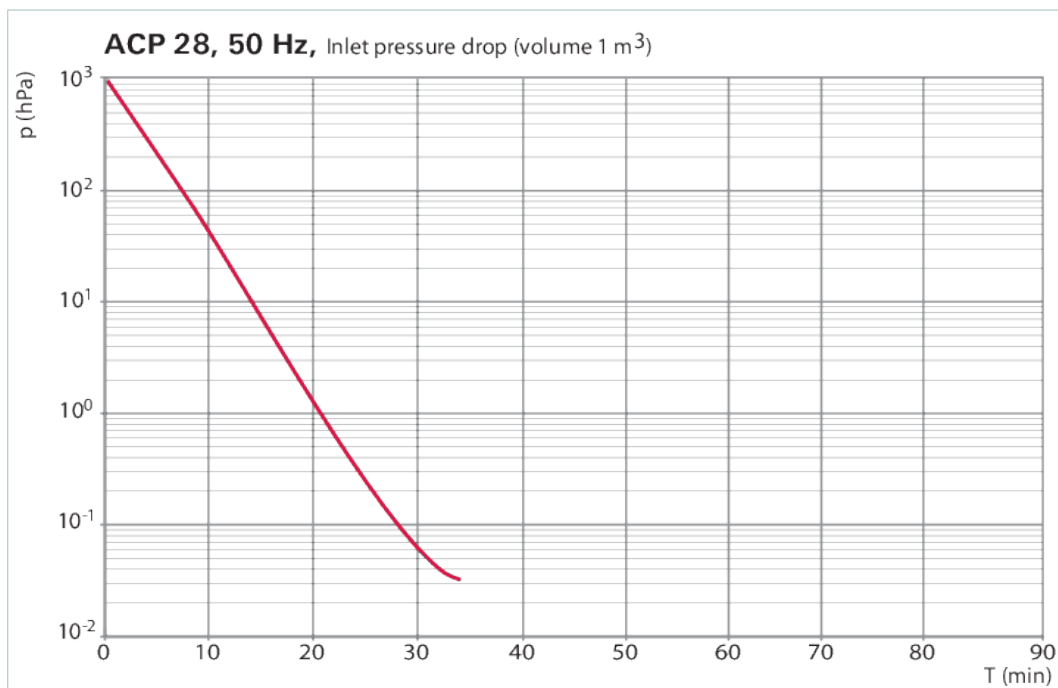

## 尺寸

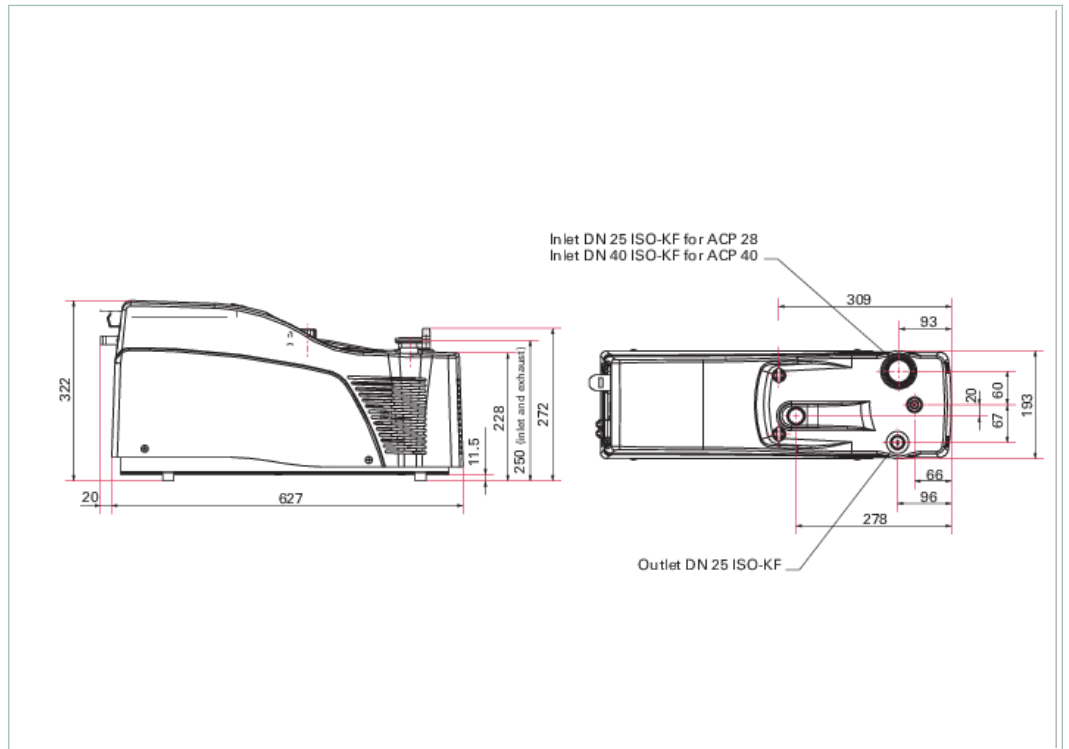

技术参数	ACP 28, 标准版本, 单相, 封闭气镇
冷却类型	空气
声压水平	65 分贝 (A)
尺寸 (长 x 宽 x 高)	647 x 193 x 322 毫米
抽速	27 m/h   15.89 cfm   450 l/min
最大氦气泄漏率	5 $10^{-7}$ hPa l/s   3.75 $10^{-7}$ Torr l/s   5 $10^{-7}$ mbar l/s
最大水蒸气容积	120 g/h
最大连续进气压力	1013 百帕
最终压力时的功率消耗	700 瓦
最高排气压力	1200 百帕
气镇	否
气镇流量	1.2 m/h   0.71 cfm   20 l/min
版本	标准
环境温度	12 – 40 摄氏度
电源电缆	是, EU 电源线
电源连接:	110 – 230 ( $\pm 10\%$ ) V AC 50/60 Hz
电源连接:频率(范围)	50/60 Hz
过程	清洁制成工艺
连接法兰 (入口)	DN 25 ISO-KF
连接法兰 (出口)	DN 25 ISO-KF
重量	30 千克

订单号	
ACP 28, 标准版本	V6SATSGEBF

<b>配件</b>	
<b>保护 灰尘分离器/入口粒子过滤器</b>	
入口粒子过滤器 IPF 25 (DN 25)	<b>111649</b>
<b>降噪 降噪盖</b>	
NRC 28/40, 用于 ACP 28 和 ACP 40 泵	<b>112637</b>
隔声室套件 SEK 28/40, 用于 ACP 28 和 ACP 40 泵	<b>114379</b>
<b>降噪 排气消声器</b>	
外部消声器 ES 25 S, DN 25	<b>109873</b>

## **VACUUM SOLUTIONS FROM A SINGLE SOURCE**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

## **COMPLETE RANGE OF PRODUCTS**

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

## **COMPETENCE IN THEORY AND PRACTICE**

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a  
perfect vacuum solution?  
Please contact us:

**Pfeiffer Vacuum GmbH**  
Headquarters · Germany  
T +49 6441 802-0  
info@pfeiffer-vacuum.de

[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

All data subject to change without prior notice.

**PFEIFFER**  **VACUUM**